

ROLLER FOLLOWERS

- Separable Roller Followers
- Non-separable Roller Followers
- Cylindrical Roller Followers



Structure and Features

IKO Roller Followers are bearings designed for outer ring rotation, in which needle rollers are incorporated in a thick walled outer ring. Both crowned and cylindrical outer rings are available. The outer rings run directly on mating cam guide surfaces, and the crowned outer ring is effective in relieving the edge load caused by mounting errors. The cylindrical outer ring, on the other hand, has a large contact area with the mating cam guide surface and is suitable for applications involving large loads or low cam guide surface hardness.


In Roller Followers, there are two types of bearings available, the caged type and the full complement type. The caged type is useful for applications at high-speed rotation. The full complement type, on the other hand, is suitable for heavy-load applications at low-speed rotation or oscillating motions.

Roller Followers include separable and non-separable types. Also, in addition to the open type, shield type and sealed type are available. The clearances between the side plates and outer ring of the shield type are narrow, and form labyrinth seals. In the sealed type, special synthetic rubber seals are assembled in these clearances, and they are effective in preventing penetration of dust and dirt.


These bearings are available in a variety of types to suit almost any kind of application. They are widely used for cam mechanisms and for linear motions of conveying equipment.

Structures of Roller Followers


Structure of Separable Roller Follower
NAST…R




Structure of Separable Roller Follower
NAST…ZZ



Structure of Non-separable Roller Follower
NART…VUUR



Structure of Cylindrical Roller Follower
NURT…R



I

NAST
NART
NURT
CRY

Types

In Roller Followers, types shown in Table 1 are available.

Table 1 Type of Roller Followers

Type			With cage		Full complement type		
			Crowned outer ring	Cylindrical outer ring	Crowned outer ring	Cylindrical outer ring	
Metric series	Separable Roller Followers RNAST, NAST	Without inner ring	Open type	RNAST… R	RNAST	—	—
		With inner ring	Open type	NAST… R	NAST	—	—
		Shield type	NAST… ZZ R	NAST… ZZ	—	—	—
		Sealed type	NAST… ZZUUR	NAST… ZZUU	—	—	—
	Non-separable Roller Followers NART	Shield type	NART… R	—	NART… V R	—	—
		Sealed type	NART… UUR	—	NART… VUUR	—	—
	Cylindrical Roller Followers NURT	Shield type	—	—	NURT… R	NURT	—
		Sealed type	—	—	CRY… V R	CRY… V	—
Inch series	Non-separable Roller Followers CRY	Shield type	—	—	CRY… VUUR	CRY… VUU	—
		Sealed type	—	—	CRY… VUU	CRY… VUU	—

Separable Roller Followers

These bearings are assembled by combining an outer ring, inner ring and Needle Roller Cage, which can be separated from one another. Thus, handling is easy. Oil lubrication is also easy, making them suitable for high-speed rotations.

There are two types: type without inner ring RNAST and type with inner ring NAST. The type with inner ring includes open type, shield type, and sealed type.

Non-separable Roller Followers

These non-separable type bearings have side plates fixed on both sides of the inner ring, and include the caged type and the full complement type. Both shield type and sealed type are available.


Inch series Non-separable Roller Followers are full complement type bearings and their surface is treated with black oxide surface treatment.

Cylindrical Roller Followers

These full complement type bearings incorporate cylindrical rollers in the outer ring in two rows and can withstand large radial loads and some axial loads. These bearings are shield type with non-separable structure.

Identification Number

Some examples of the identification number of Roller Followers are shown below.

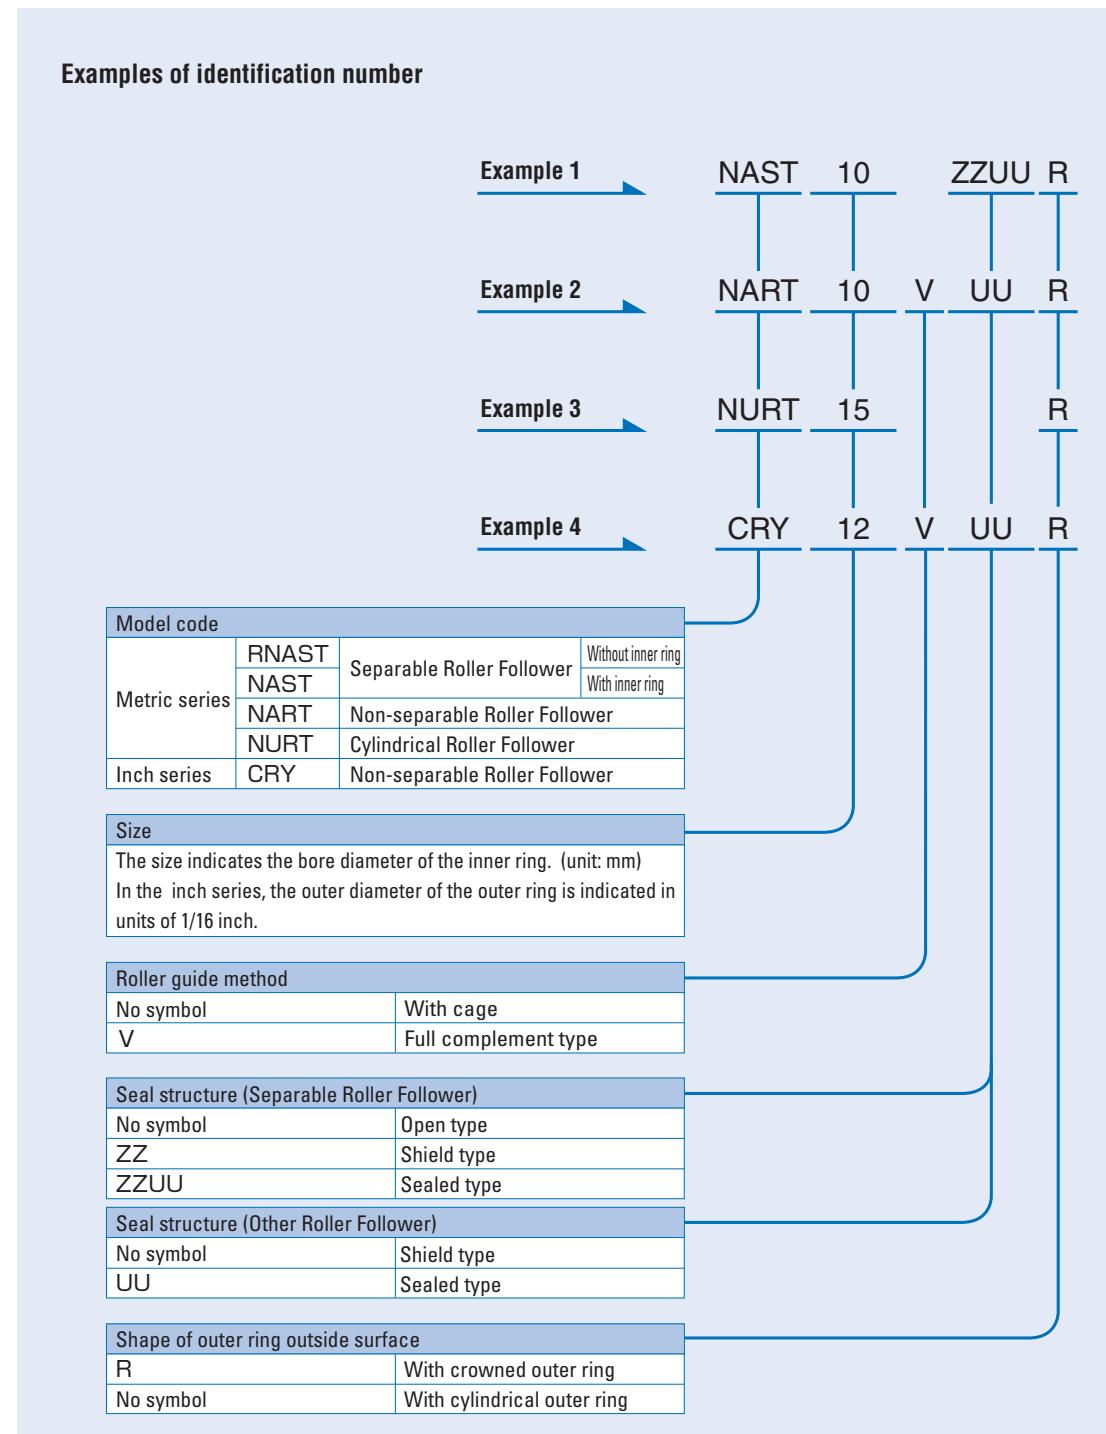

I

 NAST
NART
NURT
CRY

Accuracy

Dimensional accuracy and rotational accuracy of Roller Followers are based on Tables 2, 3 and 4. Tolerances for the smallest single roller set bore diameter of Separable Roller Followers are shown in Table 5. Roller Followers with special accuracy can also be manufactured. Please contact IKO.

Table 2 Tolerances

Dimensions and symbols		Series	Metric series		Inch series	
			Crowned outer ring	Cylindrical outer ring	Crowned outer ring	Cylindrical outer ring
Bore dia. of inner ring d	$d \leq 19.05$	See Table 3.	$+5$ -10	$+5$ -10	$+5$ -10	$+2$ -12
	$19.05 < d$					
Outside dia. of outer ring D		0 -50	See Table 4.	0 -50	0 -25	
Width of outer ring C			0 -120		0 -130	
Width of inner ring B	Separable Roller Follower		0 -120		-	
Width of bearing B	Non-separable Roller Follower	h12	-	+130 -250		
	Cylindrical Roller Follower					
Roller set bore dia. F_w	Separable Roller Follower	See Table 5.		-		

Table 3 Tolerances and allowable values of inner rings (Metric series)

Nominal bore dia. mm		Δ_{dmp} Single plane mean bore dia. deviation		V_{dp} Bore dia. variation in a single radial plane	V_{dmp} Mean bore dia. variation	K_{ia} Radial runout of assembled bearing inner ring	V_{Bs} Width variation
Over	Incl.	High	Low	(Max.)	(Max.)	(Max.)	(Max.)
2.5	10	0	-8	10	6	10	15
10	18	0	-8	10	6	10	20
18	30	0	-10	13	8	13	20
30	50	0	-12	15	9	15	20

Table 4 Tolerances and allowable values of outer rings (Metric series)

Nominal outside dia. of outer ring mm		Δ_{Dmp} Single plane mean outside dia. deviation		V_{Dp} ⁽¹⁾ Outside dia. variation in a single radial plane	V_{Dmp} ⁽¹⁾ Mean outside dia. variation	K_{ea} ⁽¹⁾ Radial runout of assembled bearing outer ring	V_{Cs} Width variation
Over	Incl.	High	Low	(Max.)	(Max.)	(Max.)	(Max.)
6	18	0	-8	10	6	15	
18	30	0	-9	12	7	15	
30	50	0	-11	14	8	20	
50	80	0	-13	16	10	25	
80	120	0	-15	19	11	35	

Note⁽¹⁾ Also applicable to the inch series.

Table 5 Tolerances of smallest single roller set bore diameter $F_{ws\ min}$ unit: μm

F_w Nominal roller set bore diameter mm	Deviation of smallest single roller set bore diameter			
	Over	Incl.	High	
6		10	+22	+13
10		18	+27	+16
18		30	+33	+20
30		50	+41	+25
50		80	+49	+30

Clearance

Radial internal clearances of Roller Followers are based on Table 6.

Table 6 Radial internal clearance

unit: μm

Identification number ⁽¹⁾				Radial internal clearance	
Metric series		Inch series		Min.	Max.
Separable Roller Followers	NART 5R		-	-	5 20
NAST 8R~NAST12R	NART 6R~NART12R		-	-	5 25
NAST15R~NAST25R	NART15R~NART20R		-	-	10 30
NAST30R~NAST40R	NART25R~NART40R		-	-	10 40
NAST45R, NAST50R	NART45R, NART50R		-	-	15 50
-	-	NURT15R~NURT30-1R	-	-	20 45
-	-	NURT35R~NURT40-1R	-	-	25 50
-	-	NURT45R~NURT50-1R	-	-	30 60
-	-	-	CRY12R~CRY56R	35	60
-	-	-	CRY64R	45	70

Note⁽¹⁾ Also applicable to the full complement type, cylindrical outer ring type, shield type and sealed type.

Fit

Roller Followers are generally used under the loading conditions in which the load direction is fixed in relation to the inner ring and rotates in relation to the outer ring. The recommended fits for shafts are shown in Table 7. Those for the inch series are shown in the dimension table.

Table 7 Recommended fit (Metric series)

Type	Tolerance class of shaft
Separable Roller Followers	without inner ring
	with inner ring
Non-separable Roller Followers	g6, h6
Cylindrical Roller Followers	

Maximum allowable static load

The load that is applicable to Roller Followers is, in some cases, determined by the strength of the outer ring rather than by the load rating of the needle roller bearing. Therefore, the maximum allowable load that is limited by the strength of outer ring is specified.

Track Capacity

Track capacity is defined as the load that can be continuously applied on a Roller Follower placed on a steel cam guide surface without causing deformation and indentation on the cam guide surface when the outer ring of the Roller Follower makes contact with the mating cam guide surface (plane). The track capacities shown in Tables 8.1 and 8.2 are applicable when the hardness of the mating cam guide surface is 40HRC

(Tensile strength 1250N/mm²). When the hardness of the mating cam guide surface differs from 40HRC, the track capacity is obtained by multiplying the value by the track capacity factor shown in Table 9. If lubrication between the outer ring and the mating cam guide surface is insufficient, seizure and/or wear may occur depending on the application. Therefore, pay attention to lubrication and surface roughness of the mating cam guide especially in the case of high-speed rotation such as for cam mechanisms.

Table 8.1 Track capacity (Metric series)

Roller Followers with crowned outer ring			Roller Followers with cylindrical outer ring					
Identification number ⁽¹⁾		Track capacity	Identification number	Track capacity	Identification number ⁽²⁾	Track capacity	Identification number	Track capacity
Separable Roller Followers	Non-separable Roller Followers	Cylindrical Roller Followers						
RNAST 5R	NART 5R	—	1 040	RNAST 5	2 310	—	—	—
(R)NAST 6R	NART 6R	—	1 330	(R)NAST 6	3 550	NAST 6ZZ	3 550	—
(R)NAST 8R	NART 8R	—	1 850	(R)NAST 8	3 980	NAST 8ZZ	4 490	—
(R)NAST10R	NART10R	—	2 470	(R)NAST10	5 610	NAST10ZZ	6 890	—
(R)NAST12R	NART12R	—	2 710	(R)NAST12	5 990	NAST12ZZ	7 350	—
(R)NAST15R	NART15R	NURT15 R	3 060	(R)NAST15	6 550	NAST15ZZ	8 030	NURT15 11 500
—	—	NURT15-1R	3 910	—	—	—	NURT15-1	13 700
(R)NAST17R	NART17R	NURT17 R	3 660	(R)NAST17	10 900	NAST17ZZ	11 700	NURT17 13 600
—	—	NURT17-1R	4 530	—	—	—	NURT17-1	16 000
(R)NAST20R	NART20R	NURT20 R	4 530	(R)NAST20	12 800	NAST20ZZ	13 800	NURT20 20 000
—	—	NURT20-1R	5 190	—	—	—	NURT20-1	22 100
(R)NAST25R	NART25R	NURT25 R	5 190	(R)NAST25	14 100	NAST25ZZ	15 300	NURT25 22 100
—	—	NURT25-1R	6 580	—	—	—	NURT25-1	26 400
(R)NAST30R	NART30R	NURT30 R	6 580	(R)NAST30	22 100	NAST30ZZ	22 100	NURT30 31 600
—	—	NURT30-1R	8 020	—	—	—	NURT30-1	36 700
(R)NAST35R	NART35R	NURT35 R	8 020	(R)NAST35	25 700	NAST35ZZ	25 700	NURT35 36 700
—	—	NURT35-1R	9 220	—	—	—	NURT35-1	40 800
(R)NAST40R	NART40R	NURT40 R	9 220	(R)NAST40	26 900	NAST40ZZ	30 300	NURT40 44 200
—	—	NURT40-1R	10 800	—	—	—	NURT40-1	49 700
(R)NAST45R	NART45R	NURT45 R	9 990	(R)NAST45	28 500	NAST45ZZ	32 200	NURT45 47 000
—	—	NURT45-1R	12 400	—	—	—	NURT45-1	55 300
(R)NAST50R	NART50R	NURT50 R	10 800	(R)NAST50	30 200	NAST50ZZ	34 000	NURT50 49 700
—	—	NURT50-1R	14 000	—	—	—	NURT50-1	60 800

Notes⁽¹⁾ Also applicable to the full complement type, shield type, and sealed type.

⁽²⁾ Also applicable to the sealed type.

Table 8.2 Track capacity (Inch series)

Crowned outer ring		Cylindrical outer ring	
Identification number ⁽¹⁾	Track capacity	Identification number ⁽¹⁾	Track capacity
CRY12R	853	CRY12	4 490
CRY14R	1 050	CRY14	5 240
CRY16R	1 420	CRY16	7 270
CRY18R	1 660	CRY18	7 700
CRY20R	2 160	CRY20	10 700
CRY22R	2 450	CRY22	11 800
CRY24R	3 410	CRY24	15 400
CRY26R	3 820	CRY26	16 700
CRY28R	4 210	CRY28	21 000
CRY30R	4 610	CRY30	22 500
CRY32R	5 690	CRY32	30 800
CRY36R	6 640	CRY36	34 700
CRY40R	8 970	CRY40	44 900
CRY44R	10 200	CRY44	49 400
CRY48R	11 400	CRY48	64 300
CRY52R	12 700	CRY52	69 600
CRY56R	14 100	CRY56	87 000
CRY64R	16 800	CRY64	113 000

Note⁽¹⁾ Also applicable to the sealed type.

Table 9 Track capacity factor

Hardness HRC	Tensile strength N/mm ²	Track capacity factor	
		Crowned outer ring	Cylindrical outer ring
20	760	0.22	0.37
25	840	0.31	0.46
30	950	0.45	0.58
35	1 080	0.65	0.75
38	1 180	0.85	0.89
40	1 250	1.00	1.00
42	1 340	1.23	1.15
44	1 435	1.52	1.32
46	1 530	1.85	1.51
48	1 635	2.27	1.73
50	1 760	2.80	1.99
52	1 880	3.46	2.29
54	2 015	4.21	2.61
56	2 150	5.13	2.97
58	2 290	6.26	3.39

Allowable Rotational Speed

The allowable rotational speed of Roller Followers is affected by mounting and operating conditions. For reference, Table 10 shows *dn* values when only pure radial loads are applied. Under actual operating conditions, the recommended *dn* value is 1/10 of the value shown in the table in consideration of the axial loads that may act on the bearing.

Table 10 *dn* values of Roller Followers⁽¹⁾

Type	Lubricant	Grease	Oil
Caged type		84 000	140 000
Full complement type		42 000	70 000
Cylindrical Roller Follower		72 000	120 000

Note⁽¹⁾ *dn* value = *d* × *n*
where, *d* : Bore diameter of bearing mm
n : Rotational speed rpm

④ In case of Roller Followers without an inner ring, the shaft requires heat treatment and grinding finish. The recommended surface hardness of the shaft is 58~64HRC, and the recommended roughness of the shaft is 0.2 μmR_a or less.

Also, the outer ring and cage are guided by side surfaces of the mounting parts. Therefore, it is recommended that the side surfaces of the mounting parts be finished by grinding or at least by machining. (See Fig. 3.)

⑤ In Non-separable Roller Followers, the side plates are press-fitted. Therefore, when mounting the Roller Followers, do not push the side plates.

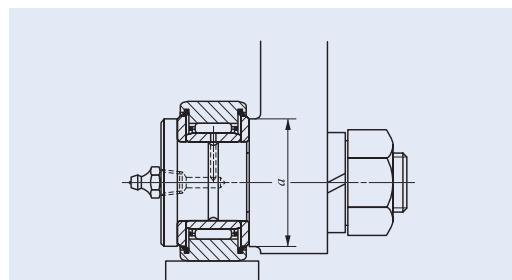


Fig. 1 Mating seating dimension "a"

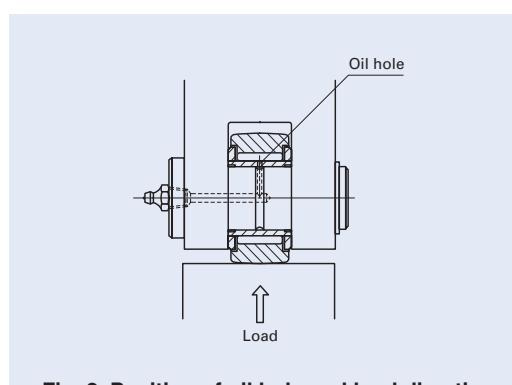


Fig. 2 Position of oil hole and load direction



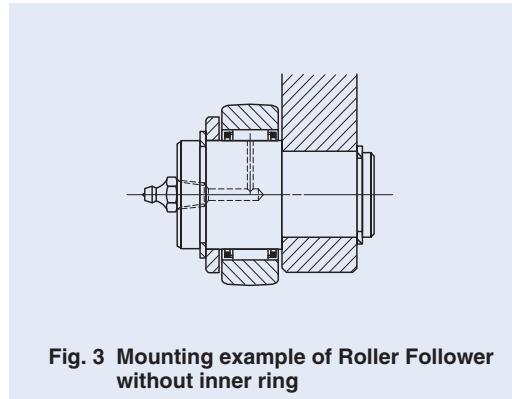


Fig. 3 Mounting example of Roller Follower without inner ring

ROLLER FOLLOWERS

Separable Roller Followers, Open Type With Cage/Without Inner Ring



Shaft dia. 7 – 60mm

RNAST···R

RNAST



Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm				Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> ₀ N
	Open type Crowned outer ring	Cylindrical outer ring		<i>F</i> _w	<i>D</i>	<i>C</i>	<i>r</i> _{s min} (¹)		
7	RNAST 5 R	RNAST 5	8.9	7	16	7.8	0.3	2 710	2 390
10	RNAST 6 R	RNAST 6	13.9	10	19	9.8	0.3	4 160	4 550
12	RNAST 8 R	RNAST 8	23.5	12	24	9.8	0.6	5 650	5 890
14	RNAST 10 R	RNAST 10	42.5	14	30	11.8	1	9 790	9 680
16	RNAST 12 R	RNAST 12	49.5	16	32	11.8	1	10 500	10 900
20	RNAST 15 R	RNAST 15	50	20	35	11.8	1	12 400	14 300
22	RNAST 17 R	RNAST 17	90	22	40	15.8	1	17 600	20 900
25	RNAST 20 R	RNAST 20	135	25	47	15.8	1	19 400	24 500
30	RNAST 25 R	RNAST 25	152	30	52	15.8	1	20 800	28 400
38	RNAST 30 R	RNAST 30	255	38	62	19.8	1	30 500	45 400
42	RNAST 35 R	RNAST 35	375	42	72	19.8	1	32 400	50 600
50	RNAST 40 R	RNAST 40	420	50	80	19.8	1.5	35 900	61 100
55	RNAST 45 R	RNAST 45	460	55	85	19.8	1.5	37 400	66 400
60	RNAST 50 R	RNAST 50	500	60	90	19.8	1.5	38 900	71 700

Note(¹) Minimum allowable value of chamfer dimension *r*

Remarks1. No oil hole is provided.

2. Not provided with prepacked grease. Perform proper lubrication for use.

Separable Roller Followers, Open Type With Cage/With Inner Ring



Shaft dia. 6 – 50mm

NAST···R

NAST

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm						Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> ₀ N	Assembled inner ring	
	Open type Crowned outer ring	Cylindrical outer ring		<i>d</i>	<i>D</i>	<i>B</i>	<i>C</i>	<i>r</i> _{s min} (¹)	<i>r</i> _{1s min} (¹)				
6	NAST 6 R	NAST 6	17.8	6	19	10	9.8	0.3	0.3	10	4 160	4 550	LRT 61010 S
8	NAST 8 R	NAST 8	28	8	24	10	9.8	0.6	0.3	12	5 650	5 890	LRT 81210 S
10	NAST 10 R	NAST 10	49.5	10	30	12	11.8	1	0.3	14	9 790	9 680	LRT 101412 S
12	NAST 12 R	NAST 12	58	12	32	12	11.8	1	0.3	16	10 500	10 900	LRT 121612 S
15	NAST 15 R	NAST 15	62	15	35	12	11.8	1	0.3	20	12 400	14 300	LRT 152012 S
17	NAST 17 R	NAST 17	109	17	40	16	15.8	1	0.3	22	17 600	20 900	LRT 172216 S
20	NAST 20 R	NAST 20	157	20	47	16	15.8	1	0.3	25	19 400	24 500	LRT 202516 S
25	NAST 25 R	NAST 25	180	25	52	16	15.8	1	0.3	30	20 800	28 400	LRT 253016 S
30	NAST 30 R	NAST 30	320	30	62	20	19.8	1	0.6	38	30 500	45 400	LRT 303820 S
35	NAST 35 R	NAST 35	440	35	72	20	19.8	1	0.6	42	32 400	50 600	LRT 354220 S
40	NAST 40 R	NAST 40	530	40	80	20	19.8	1.5	1	50	35 900	61 100	LRT 405020 S
45	NAST 45 R	NAST 45	580	45	85	20	19.8	1.5	1	55	37 400	66 400	LRT 455520 S
50	NAST 50 R	NAST 50	635	50	90	20	19.8	1.5	1	60	38 900	71 700	LRT 506020 S

Note(¹) Minimum allowable value of chamfer dimension *r* or *r*₁


Remarks1. No oil hole is provided.

2. Not provided with prepacked grease. Perform proper lubrication for use.

ROLLER FOLLOWERS


Separable Roller Followers, Shield Type With Cage/With Inner Ring

Separable Roller Followers, Sealed Type With Cage/With Inner Ring




Shaft dia. 6 – 50mm


NAST…ZZR



NAST…ZZ



NAST…ZUUR



NAST…ZUU

Shaft dia. mm	Identification number				Mass (Ref.) g
	Shield type		Sealed type		
	Crowned outer ring	Cylindrical outer ring	Crowned outer ring	Cylindrical outer ring	
6	NAST 6 ZZR	NAST 6 ZZ	NAST 6 ZUUR	NAST 6 ZUUU	24.5
8	NAST 8 ZZR	NAST 8 ZZ	NAST 8 ZUUR	NAST 8 ZUUU	39
10	NAST 10 ZZR	NAST 10 ZZ	NAST 10 ZUUR	NAST 10 ZUUU	65
12	NAST 12 ZZR	NAST 12 ZZ	NAST 12 ZUUR	NAST 12 ZUUU	75
15	NAST 15 ZZR	NAST 15 ZZ	NAST 15 ZUUR	NAST 15 ZUUU	83
17	NAST 17 ZZR	NAST 17 ZZ	NAST 17 ZUUR	NAST 17 ZUUU	135
20	NAST 20 ZZR	NAST 20 ZZ	NAST 20 ZUUR	NAST 20 ZUUU	195
25	NAST 25 ZZR	NAST 25 ZZ	NAST 25 ZUUR	NAST 25 ZUUU	225
30	NAST 30 ZZR	NAST 30 ZZ	NAST 30 ZUUR	NAST 30 ZUUU	400
35	NAST 35 ZZR	NAST 35 ZZ	NAST 35 ZUUR	NAST 35 ZUUU	550
40	NAST 40 ZZR	NAST 40 ZZ	NAST 40 ZUUR	NAST 40 ZUUU	710
45	NAST 45 ZZR	NAST 45 ZZ	NAST 45 ZUUR	NAST 45 ZUUU	760
50	NAST 50 ZZR	NAST 50 ZZ	NAST 50 ZUUR	NAST 50 ZUUU	830

Remarks 1. The inner ring has an oil hole.

2. The sealed type is provided with prepacked grease. The shield type is not provided with prepacked grease. Perform proper lubrication for use.


d	Boundary dimensions mm						Basic dynamic load rating C N	Basic static load rating C ₀ N
	D	B	C	a	e	f		
6	19	14	13.8	14	2.5	0.8	4 160	4 550
8	24	14	13.8	17.5	2.5	0.8	5 650	5 890
10	30	16	15.8	23.5	2.5	0.8	9 790	9 680
12	32	16	15.8	25.5	2.5	0.8	10 500	10 900
15	35	16	15.8	29	2.5	0.8	12 400	14 300
17	40	20	19.8	32.5	3	1	17 600	20 900
20	47	20	19.8	38	3	1	19 400	24 500
25	52	20	19.8	43	3	1	20 800	28 400
30	62	25	24.8	50.5	4	1.2	30 500	45 400
35	72	25	24.8	53.5	4	1.2	32 400	50 600
40	80	26	25.8	61.5	4	1.2	35 900	61 100
45	85	26	25.8	66.5	4	1.2	37 400	66 400
50	90	26	25.8	76	4	1.2	38 900	71 700

I
NAST
NART
NURT
CRY

ROLLER FOLLOWERS

Non-separable Roller Followers With Cage/With Inner Ring

Full Complement Type/With Inner Ring




Shaft dia. 5 – 40mm


Shaft dia. mm	Identification number Shield type Crowned outer ring		Sealed type Crowned outer ring		Mass (Ref.) g
	With cage	Full complement	With cage	Full complement	
5	NART 5 R —	— NART 5 VR	NART 5 UUR —	— NART 5 VUUR	14.5 15.1
6	NART 6 R —	— NART 6 VR	NART 6 UUR —	— NART 6 VUUR	20.5 21.5
8	NART 8 R —	— NART 8 VR	NART 8 UUR —	— NART 8 VUUR	41.5 42.5
10	NART 10 R —	— NART 10 VR	NART 10 UUR —	— NART 10 VUUR	64.5 66.5
12	NART 12 R —	— NART 12 VR	NART 12 UUR —	— NART 12 VUUR	71 73
15	NART 15 R —	— NART 15 VR	NART 15 UUR —	— NART 15 VUUR	102 106
17	NART 17 R —	— NART 17 VR	NART 17 UUR —	— NART 17 VUUR	149 155
20	NART 20 R —	— NART 20 VR	NART 20 UUR —	— NART 20 VUUR	250 255
25	NART 25 R —	— NART 25 VR	NART 25 UUR —	— NART 25 VUUR	285 295
30	NART 30 R —	— NART 30 VR	NART 30 UUR —	— NART 30 VUUR	470 485
35	NART 35 R —	— NART 35 VR	NART 35 UUR —	— NART 35 VUUR	640 655
40	NART 40 R —	— NART 40 VR	NART 40 UUR —	— NART 40 VUUR	845 865

Remarks 1. The inner ring has an oil hole.


2. The sealed type is provided with prepacked grease. The shield type is not provided with prepacked grease. Perform proper lubrication for use.




NART···R



NART···VR



NART···UUR



NART···VUUR


d	Boundary dimensions mm					Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> ₀ N	Maximum allowable static load N
	<i>D</i>	<i>B</i>	<i>C</i>	<i>a</i>				
5	16	12	11	12		3 650	3 680	3 680
5	16	12	11	12		6 810	8 370	7 310
6	19	12	11	14		4 250	4 740	4 740
6	19	12	11	14		7 690	10 300	10 300
8	24	15	14	17.5		5 640	5 900	5 900
8	24	15	14	17.5		11 800	15 600	15 600
10	30	15	14	23.5		8 030	7 540	7 540
10	30	15	14	23.5		15 600	18 100	17 500
12	32	15	14	25.5		8 580	8 470	8 470
12	32	15	14	25.5		16 800	20 500	18 600
15	35	19	18	29		13 700	16 400	16 400
15	35	19	18	29		25 200	36 400	24 000
17	40	21	20	32.5		17 600	21 000	21 000
17	40	21	20	32.5		32 000	46 300	33 100
20	47	25	24	38		23 000	30 700	30 700
20	47	25	24	38		41 600	67 300	67 300
25	52	25	24	43		24 700	35 400	35 400
25	52	25	24	43		45 500	79 100	79 100
30	62	29	28	50.5		33 600	51 400	51 400
30	62	29	28	50.5		59 900	110 000	92 500
35	72	29	28	53.5		35 700	57 400	57 400
35	72	29	28	53.5		63 100	121 000	121 000
40	80	32	30	61.5		44 900	81 500	81 500
40	80	32	30	61.5		76 300	164 000	164 000

I
NAST
NART
NURT
CRY

ROLLER FOLLOWERS


Non-separable Roller Followers With Cage/With Inner Ring

Full Complement Type/With Inner Ring




Shaft dia. 45 – 50mm


NART…R



NART…VR



NART…UUR



NART…VUUR

Shaft dia. mm	Identification number				Mass (Ref.) g	
	Shield type		Sealed type			
	Crowned outer ring	Caged outer ring	Crowned outer ring	Caged outer ring		
45	NART 45 R —	— NART 45 VR	NART 45 UUR —	— NART 45 VUUR	915 935	
50	NART 50 R —	— NART 50 VR	NART 50 UUR —	— NART 50 VUUR	980 1 010	


Remarks 1. The inner ring has an oil hole.

2. The sealed type is provided with prepacked grease. The shield type is not provided with prepacked grease. Perform proper lubrication for use.

d	Boundary dimensions mm					Basic dynamic load rating C N	Basic static load rating C₀ N	Maximum allowable static load N
	D	B	C	a				
45	85	32	30	66.5	46 800	88 600	88 600	
45	85	32	30	66.5	80 300	181 000	181 000	
50	90	32	30	76	48 600	95 600	95 600	
50	90	32	30	76	84 300	198 000	198 000	

ROLLER FOLLOWERS

Cylindrical Roller Followers | Full Complement Type/With Inner Ring



Shaft dia. 15 – 50mm


NURT...R

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm					
	Crowned outer ring	Cylindrical outer ring		d	D	B	C	a	r_s min ⁽¹⁾
15	NURT 15 R	NURT 15	100	15	35	19	18	20	0.6
	NURT 15-1 R	NURT 15-1	160	15	42	19	18	20	0.6
17	NURT 17 R	NURT 17	147	17	40	21	20	22	1
	NURT 17-1 R	NURT 17-1	222	17	47	21	20	22	1
20	NURT 20 R	NURT 20	245	20	47	25	24	27	1
	NURT 20-1 R	NURT 20-1	321	20	52	25	24	27	1
25	NURT 25 R	NURT 25	281	25	52	25	24	31	1
	NURT 25-1 R	NURT 25-1	450	25	62	25	24	31	1
30	NURT 30 R	NURT 30	466	30	62	29	28	38	1
	NURT 30-1 R	NURT 30-1	697	30	72	29	28	38	1
35	NURT 35 R	NURT 35	630	35	72	29	28	44	1
	NURT 35-1 R	NURT 35-1	840	35	80	29	28	44	1
40	NURT 40 R	NURT 40	817	40	80	32	30	49	1
	NURT 40-1 R	NURT 40-1	1 130	40	90	32	30	49	1
45	NURT 45 R	NURT 45	883	45	85	32	30	53	1
	NURT 45-1 R	NURT 45-1	1 400	45	100	32	30	53	1
50	NURT 50 R	NURT 50	950	50	90	32	30	58	1
	NURT 50-1 R	NURT 50-1	1 690	50	110	32	30	58	1

Note⁽¹⁾ Minimum allowable value of chamfer dimension r or r_1

Remarks 1. The inner ring has an oil hole.

2. Provided with prepacked grease.



NURT



r_{1s} min ⁽¹⁾	Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Maximum allowable static load N
0.3	23 400	27 300	11 800
	23 400	27 300	27 300
0.3	25 200	30 900	20 300
	25 200	30 900	30 900
0.3	38 900	49 000	27 200
	38 900	49 000	49 000
0.3	43 100	58 100	30 000
	43 100	58 100	58 100
0.3	58 200	75 300	35 200
	58 200	75 300	75 300
0.6	63 900	88 800	57 000
	63 900	88 800	88 800
0.6	86 500	122 000	75 300
	86 500	122 000	122 000
0.6	91 500	135 000	78 700
	91 500	135 000	135 000
0.6	96 300	148 000	82 100
	96 300	148 000	148 000

I

NAST
NART
NURT
CRY

ROLLER FOLLOWERS

Non-separable Roller Followers, Inch Series Full Complement Type / With Inner Ring



Shaft dia. 6.350 – 31.750mm

CRY...VR

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)			
	Shield type Crownner outer ring	Sealed type Crowned outer ring		d	D	B	C
6.350 ($\frac{1}{4}$)	CRY 12 VR CRY 14 VR	CRY 12 VUUR CRY 14 VUUR	27 36	6.350 ($\frac{1}{4}$) 6.350 ($\frac{1}{4}$)	19.050 ($\frac{3}{4}$) 22.225 ($\frac{7}{8}$)	14.288(0.5625) 14.288(0.5625)	12.700 ($\frac{1}{2}$) 12.700 ($\frac{1}{2}$)
7.938 ($\frac{5}{16}$)	CRY 16 VR CRY 18 VR	CRY 16 VUUR CRY 18 VUUR	68 77	7.938 ($\frac{5}{16}$) 7.938 ($\frac{5}{16}$)	25.400 (1) 28.575 ($1\frac{1}{8}$)	17.463(0.6875) 17.463(0.6875)	15.875 ($\frac{5}{8}$) 15.875 ($\frac{5}{8}$)
9.525 ($\frac{3}{8}$)	CRY 20 VR CRY 22 VR	CRY 20 VUUR CRY 22 VUUR	109 136	9.525 ($\frac{3}{8}$) 9.525 ($\frac{3}{8}$)	31.750 (1 $\frac{1}{4}$) 34.925 (1 $\frac{3}{8}$)	20.638(0.8125) 20.638(0.8125)	19.050 ($\frac{3}{4}$) 19.050 ($\frac{3}{4}$)
11.112 ($\frac{7}{16}$)	CRY 24 VR CRY 26 VR	CRY 24 VUUR CRY 26 VUUR	186 227	11.112 ($\frac{7}{16}$) 11.112 ($\frac{7}{16}$)	38.100 (1 $\frac{1}{2}$) 41.275 (1 $\frac{3}{8}$)	23.813(0.9375) 23.813(0.9375)	22.225 ($\frac{7}{8}$) 22.225 ($\frac{7}{8}$)
12.700 ($\frac{1}{2}$)	CRY 28 VR CRY 30 VR	CRY 28 VUUR CRY 30 VUUR	290 363	12.700 ($\frac{1}{2}$) 12.700 ($\frac{1}{2}$)	44.450 (1 $\frac{1}{4}$) 47.625 (1 $\frac{1}{8}$)	26.988(1.0625) 26.988(1.0625)	25.400 (1) 25.400 (1)
15.875 ($\frac{5}{8}$)	CRY 32 VR CRY 36 VR	CRY 32 VUUR CRY 36 VUUR	476 599	15.875 ($\frac{5}{8}$) 15.875 ($\frac{5}{8}$)	50.800 (2) 57.150 (2 $\frac{1}{4}$)	33.338(1.3125) 33.338(1.3125)	31.750 (1 $\frac{1}{4}$) 31.750 (1 $\frac{1}{4}$)
19.050 ($\frac{3}{4}$)	CRY 40 VR CRY 44 VR	CRY 40 VUUR CRY 44 VUUR	816 1 020	19.050 ($\frac{3}{4}$) 19.050 ($\frac{3}{4}$)	63.500 (2 $\frac{1}{2}$) 69.850 (2 $\frac{3}{4}$)	39.688(1.5625) 39.688(1.5625)	38.100 (1 $\frac{1}{2}$) 38.100 (1 $\frac{1}{2}$)
25.400 (1)	CRY 48 VR CRY 52 VR	CRY 48 VUUR CRY 52 VUUR	1 410 1 640	25.400 (1) 25.400 (1)	76.200 (3) 82.550 (3 $\frac{1}{4}$)	46.038(1.8125) 46.038(1.8125)	44.450 (1 $\frac{1}{4}$) 44.450 (1 $\frac{1}{4}$)
28.575 ($1\frac{1}{8}$)	CRY 56 VR	CRY 56 VUUR	2 250	28.575 (1 $\frac{1}{8}$)	88.900 (3 $\frac{1}{2}$)	52.388(2.0625)	50.800 (2)
31.750 ($1\frac{1}{4}$)	CRY 64 VR	CRY 64 VUUR	3 200	31.750 (1 $\frac{1}{4}$)	101.600 (4)	58.738(2.3125)	57.150 (2 $\frac{1}{4}$)

Remarks1. The inner ring has an oil groove and an oil hole.


2. Provided with prepacked grease.

a	R	Shaft dia. mm						Basic dynamic load rating C N	Basic static load rating C ₀ N		
		Push fit		Drive fit		Press fit					
		Min.	Max.	Min.	Max.	Min.	Max.				
14.4(0.567)	250 (10)	6.332	6.342	6.348	6.358	6.353	6.363	8 710	12 300		
14.4(0.567)	250 (10)	6.332	6.342	6.348	6.358	6.353	6.363	8 710	12 300		
19.6(0.772)	300 (12)	7.920	7.930	7.935	7.945	7.940	7.950	13 100	22 700		
19.6(0.772)	300 (12)	7.920	7.930	7.935	7.945	7.940	7.950	13 100	22 700		
25.0(0.984)	360 (14)	9.507	9.517	9.523	9.533	9.528	9.538	23 600	31 700		
25.0(0.984)	360 (14)	9.507	9.517	9.523	9.533	9.528	9.538	23 600	31 700		
28.8(1.134)	500 (20)	11.095	11.105	11.110	11.120	11.115	11.125	28 200	40 100		
28.8(1.134)	500 (20)	11.095	11.105	11.110	11.120	11.115	11.125	28 200	40 100		
32.7(1.287)	500 (20)	12.682	12.692	12.698	12.708	12.708	12.718	35 300	55 600		
32.7(1.287)	500 (20)	12.682	12.692	12.698	12.708	12.708	12.718	35 300	55 600		
36.0(1.417)	600 (24)	15.857	15.867	15.873	15.883	15.883	15.893	45 700	80 600		
36.0(1.417)	600 (24)	15.857	15.867	15.873	15.883	15.883	15.893	45 700	80 600		
43.3(1.705)	760 (30)	19.032	19.042	19.048	19.058	19.058	19.068	61 400	116 000		
43.3(1.705)	760 (30)	19.032	19.042	19.048	19.058	19.058	19.068	61 400	116 000		
54.0(2.125)	760 (30)	25.377	25.390	25.397	25.410	25.408	25.420	77 600	172 000		
54.0(2.125)	760 (30)	25.377	25.390	25.397	25.410	25.408	25.420	77 600	172 000		
61.9(2.437)	760 (30)	28.522	28.565	28.572	28.585	28.583	28.595	111 000	239 000		
71.0(2.797)	760 (30)	31.727	31.740	31.747	31.760	31.758	31.770	142 000	317 000		


I
NAST
NART
NURT
CRY

ROLLER FOLLOWERS

Non-separable Roller Followers, Inch Series Full Complement Type /With Inner Ring



CRY...V



CRY...VUU

Shaft dia. 6.350 – 31.750mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)			
	Shield type Cylindrical outer ring	Sealed type Cylindrical outer ring		d	D	B	C
6.350 ($\frac{1}{4}$)	CRY 12 V CRY 14 V	CRY 12 VUU CRY 14 VUU	27	6.350 ($\frac{1}{4}$)	19.050 ($\frac{3}{4}$)	14.288(0.5625)	12.700 ($\frac{1}{2}$)
			36	6.350 ($\frac{1}{4}$)	22.225 ($\frac{7}{8}$)	14.288(0.5625)	12.700 ($\frac{1}{2}$)
7.938 ($\frac{5}{16}$)	CRY 16 V CRY 18 V	CRY 16 VUU CRY 18 VUU	68	7.938 ($\frac{5}{16}$)	25.400 (1)	17.463(0.6875)	15.875 ($\frac{5}{8}$)
			77	7.938 ($\frac{5}{16}$)	28.575 (1 $\frac{1}{8}$)	17.463(0.6875)	15.875 ($\frac{5}{8}$)
9.525 ($\frac{3}{8}$)	CRY 20 V CRY 22 V	CRY 20 VUU CRY 22 VUU	109	9.525 ($\frac{3}{8}$)	31.750 (1 $\frac{1}{4}$)	20.638(0.8125)	19.050 ($\frac{3}{4}$)
			136	9.525 ($\frac{3}{8}$)	34.925 (1 $\frac{3}{8}$)	20.638(0.8125)	19.050 ($\frac{3}{4}$)
11.112 ($\frac{7}{16}$)	CRY 24 V CRY 26 V	CRY 24 VUU CRY 26 VUU	186	11.112 ($\frac{7}{16}$)	38.100 (1 $\frac{1}{2}$)	23.813(0.9375)	22.225 ($\frac{7}{8}$)
			227	11.112 ($\frac{7}{16}$)	41.275 (1 $\frac{3}{8}$)	23.813(0.9375)	22.225 ($\frac{7}{8}$)
12.700 ($\frac{1}{2}$)	CRY 28 V CRY 30 V	CRY 28 VUU CRY 30 VUU	290	12.700 ($\frac{1}{2}$)	44.450 (1 $\frac{1}{4}$)	26.988(1.0625)	25.400 (1)
			363	12.700 ($\frac{1}{2}$)	47.625 (1 $\frac{1}{8}$)	26.988(1.0625)	25.400 (1)
15.875 ($\frac{5}{8}$)	CRY 32 V CRY 36 V	CRY 32 VUU CRY 36 VUU	476	15.875 ($\frac{5}{8}$)	50.800 (2)	33.338(1.3125)	31.750 (1 $\frac{1}{4}$)
			599	15.875 ($\frac{5}{8}$)	57.150 (2 $\frac{1}{4}$)	33.338(1.3125)	31.750 (1 $\frac{1}{4}$)
19.050 ($\frac{3}{4}$)	CRY 40 V CRY 44 V	CRY 40 VUU CRY 44 VUU	816	19.050 ($\frac{3}{4}$)	63.500 (2 $\frac{1}{2}$)	39.688(1.5625)	38.100 (1 $\frac{1}{2}$)
			1020	19.050 ($\frac{3}{4}$)	69.850 (2 $\frac{3}{4}$)	39.688(1.5625)	38.100 (1 $\frac{1}{2}$)
25.400 (1)	CRY 48 V CRY 52 V	CRY 48 VUU CRY 52 VUU	1410	25.400 (1)	76.200 (3)	46.038(1.8125)	44.450 (1 $\frac{1}{4}$)
			1640	25.400 (1)	82.550 (3 $\frac{1}{4}$)	46.038(1.8125)	44.450 (1 $\frac{1}{4}$)
28.575 ($1\frac{1}{8}$)	CRY 56 V	CRY 56 VUU	2250	28.575 (1 $\frac{1}{8}$)	88.900 (3 $\frac{1}{2}$)	52.388(2.0625)	50.800 (2)
31.750 ($1\frac{1}{4}$)	CRY 64 V	CRY 64 VUU	3200	31.750 (1 $\frac{1}{4}$)	101.600 (4)	58.738(2.3125)	57.150 (2 $\frac{1}{4}$)

Remarks1. The inner ring has an oil groove and an oil hole.

2. Provided with prepacked grease.

a	r	Shaft dia. mm						Basic dynamic load rating C N	Basic static load rating C ₀ N		
		Push fit		Drive fit		Press fit					
		Min.	Max.	Min.	Max.	Min.	Max.				
14.4(0.567)	0.794 ($\frac{1}{32}$)	6.332	6.342	6.348	6.358	6.353	6.363	8 710	12 300		
14.4(0.567)	0.794 ($\frac{1}{32}$)	6.332	6.342	6.348	6.358	6.353	6.363	8 710	12 300		
19.6(0.772)	1.191 ($\frac{3}{64}$)	7.920	7.930	7.935	7.945	7.940	7.950	13 100	22 700		
19.6(0.772)	1.588 ($\frac{1}{16}$)	7.920	7.930	7.935	7.945	7.940	7.950	13 100	22 700		
25.0(0.984)	1.588 ($\frac{1}{16}$)	9.507	9.517	9.523	9.533	9.528	9.538	23 600	31 700		
25.0(0.984)	1.588 ($\frac{1}{16}$)	9.507	9.517	9.523	9.533	9.528	9.538	23 600	31 700		
28.8(1.134)	1.588 ($\frac{1}{16}$)	11.095	11.105	11.110	11.120	11.115	11.125	28 200	40 100		
28.8(1.134)	1.588 ($\frac{1}{16}$)	11.095	11.105	11.110	11.120	11.115	11.125	28 200	40 100		
32.7(1.287)	1.588 ($\frac{1}{16}$)	12.682	12.692	12.698	12.708	12.708	12.718	35 300	55 600		
32.7(1.287)	1.588 ($\frac{1}{16}$)	12.682	12.692	12.698	12.708	12.708	12.718	35 300	55 600		
36.0(1.417)	1.588 ($\frac{1}{16}$)	15.857	15.867	15.873	15.883	15.883	15.893	45 700	80 600		
36.0(1.417)	1.588 ($\frac{1}{16}$)	15.857	15.867	15.873	15.883	15.883	15.893	45 700	80 600		
43.3(1.705)	2.381 ($\frac{3}{32}$)	19.032	19.042	19.048	19.058	19.058	19.068	61 400	116 000		
43.3(1.705)	2.381 ($\frac{3}{32}$)	19.032	19.042	19.048	19.058	19.058	19.068	61 400	116 000		
54.0(2.125)	2.381 ($\frac{3}{32}$)	25.377	25.390	25.397	25.410	25.408	25.420	77 600	172 000		
54.0(2.125)	2.381 ($\frac{3}{32}$)	25.377	25.390	25.397	25.410	25.408	25.420	77 600	172 000		
61.9(2.437)	2.381 ($\frac{3}{32}$)	28.522	28.565	28.572	28.585	28.583	28.595	111 000	239 000		
71.0(2.797)	2.381 ($\frac{3}{32}$)	31.727	31.740	31.747	31.760	31.758	31.770	142 000	317 000		

NAST
NART
NURT
CRY