


KULIČKOVÁ LOŽISKA DVOUŘADÁ

Průměr díry 10 – 100 mm

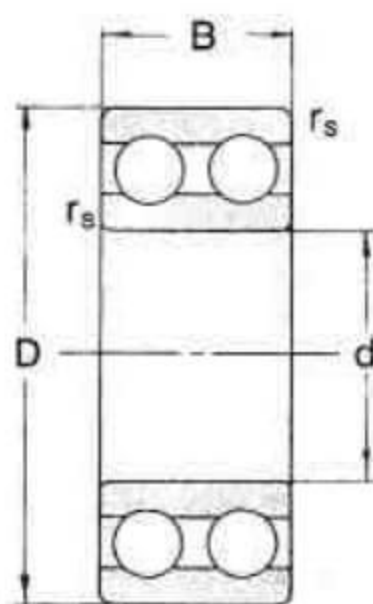

Rozměry				Označení	Únosnosti		Mezní otáčky	
d	D	B	r _s min		dyn. C	stat. C ₀	tuk	olej
mm					kN		min ⁻¹	
10	30	14	0,6	4200BTNG	9,15	5,2	18000	24000
12	32	14	0,6	4201BTNG	9,30	5,5	16000	20000
15	35	14	0,6	4202BTNG	10,4	6,7	14000	18000
	42	17	1,0	4302BTNG	14,6	9,2	13000	17000
17	40	16	0,6	4203BTNG	14,6	9,5	13000	18000
	47	19	1,0	4303BTNG	19,6	13,2	11000	17000
20	47	18	1,0	4204BTNG	18,0	12,7	10000	14000
	52	21	1,1	4304BTNG	23,2	16,0	9500	13000
25	52	18	1,0	4205BTNG	19,3	14,6	9000	12000
	62	24	1,1	4305BTNG	31,5	22,4	8000	10000
30	62	20	1,0	4206BTNG	26,0	20,8	7500	9500
	72	27	1,1	4306BTNG	40,0	30,5	6700	8500
35	72	23	1,1	4207BTNG	32,0	26,0	6700	8500
	80	31	1,5	4307BTNG	51,0	38,0	6300	8000
40	80	23	1,1	4208BTNG	34,0	30,0	6000	7500
	90	33	1,5	4308BTNG	63,0	48,0	5600	7000
45	85	23	1,1	4209BTNG	36,0	33,5	5600	7000
	100	36	1,5	4309BTNG	72,0	60,0	4800	6000
50	90	23	1,1	4210BTNG	37,5	36,5	5000	6300
	110	40	2,0	4310BTNG	90,0	75,0	4300	5300
55	100	25	1,5	4211BTNG	43,0	43,0	4500	5600
	120	43	2,0	4311BTNG	104,0	90,0	4000	5000
60	110	28	1,5	4212BTNG	57,0	58,5	4000	5000
	130	46	2,1	4312BTNG	120,0	106,0	3600	4500
65	120	31	1,5	4213BTNG	67,0	67,0	3800	4800
	140	48	2,1	4313BTNG	129,0	98,0	3600	4500
70	125	31	1,5	4214BTNG	69,5	73,5	3600	4500
	150	51	2,1	4314BTNG	146,0	114,0	3200	4000
75	130	31	1,5	4215BZNG	73,5	80,0	3400	4300
	160	55	2,1	4315BTNG	170,0	134,0	3000	3800
80	140	33	2,0	4216BTNG	80,0	90,0	3200	4000
	170	58	2,1	4316M	170,0	207,0	2800	3600
85	150	36	2,0	4217BTNG	93,0	106,0	3000	3800
90	160	40	2,0	4218BTNG	112,0	122,0	2800	3600
95	170	43	2,1	4219M	115,0	151,5	2600	3400
100	180	46	2,1	4220M	129,0	170,0	2600	3400